

Description

Single pole thermal-magnetic circuit breaker with tease-free, trip-free, snap action mechanism and two button operation (M-type TM CBE to EN 60934). Designed for plug-in mounting with E-T-A sockets 17-P10-Si, 23-P10-Si, 63-P10-Si; or panel mounting using E-T-A clips. Featuring an unprotected shunt tap terminal and optional auxiliary contacts. Type 3900 offers lower internal resistance values and is fitted as standard with auxiliary contacts and an intermediate reset position in which all contacts are isolated.

Approved to CBE standard EN 60934 (IEC 60934).

Typical applications

Process control systems, instrumentation, communications systems, rail vehicles.

Ordering information

Type No.	
3600	standard version with shunt tap terminal -3
3900	low-resistance version
Terminal design	
P10	blade terminals 6.3-0.8 (QC .250)
Auxiliary contacts (3900: intermediate position as standard)	
Si	with blade terminals 6.3-0.8, one each NO/NC,
Si60	special auxiliary contact (only 3900)
	1 NO, closed in the intermediate and ON position
ZR-Si	auxiliary contacts with intermediate position (only 3600)
ZR-Si60	special auxiliary contact (only 3600)
	1 NO, closed in the intermediate and ON position
Si3-R	special auxiliary contacts, 2 NC contacts with reset button (not approved)
Current ratings	
	0.05...16 A (type 3600)
	0.05...10 A (type 3900)
3600 - P10 - Si - 10 A	ordering example

The exact part number required can be built up from the table of choices shown above. Ordering references for optional features should be omitted if not required.

Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)		Current rating (A)	Internal resistance (Ω)	
	3600	3900		3600	3900
0.05	447	211	3	0.19	0.054
0.1	131	48	4	0.090	0.035
0.2	40	12.4	5	0.061	0.025
0.3	19.3	5.4	6	0.041	≤ 0.02
0.4	10.4	3.1	7	0.034	≤ 0.02
0.5	7.1	2.0	8	≤ 0.02	≤ 0.02
0.6	4.3	1.32	10	≤ 0.02	≤ 0.02
0.8	2.5	0.76	12	≤ 0.02	
1	1.67	0.49	14	≤ 0.02	
1.5	0.61	0.21	15	≤ 0.02	
2	0.38	0.101	16	≤ 0.02	
2.5	0.24	0.078			



3600
standard type

3900
low-resistance type

Technical data

For further details please see chapter: Technical Information


Voltage rating	AC 240 V, 50/60 Hz; DC 65 V (UL: AC 250 V; DC 65 V)		
Current rating range	3600: 0.05...16 A 3900: 0.05...10 A		
Auxiliary circuit	1 A, AC 240 V / DC 65 V		
Typical life	5,000 operations at 1 x I _N , inductive 5,000 operations at 2 x I _N , resistive		
Ambient temperature	-30...+60 °C (-22...+140 °F)		
Insulation co-ordination (IEC 60664 and 60664 A)	rated impulse withstand voltage 2.5 kV reinforced insulation in operating area	pollution degree 2	
Dielectric strength (IEC 60664 and 60664A) operating area main/aux. circuit aux. circuit 4-5/6-7	test voltage AC 3,000 V AC 1,500 V AC 840 V		
Insulation resistance	>100 MΩ (DC 500 V)		
Interrupting capacity I _{cn}	3600 0.05...0.8 A 1...2 A 2.5...16 A	3900 0.05...0.2 A 0.3...2 A 2.5...10 A	self-limiting 200 A 400 A
Interrupting capacity (UL 1077) type 3600:	I _N 0.05...16 A 0.05...16 A	U _N AC 250 V DC 80 V	1,000 A 1,000 A
Degree of protection (IEC 60529/DIN 40050)	operating area IP40 terminal area IP00		
Vibration	5 g (57-500 Hz), ± 0.38 mm (10-57 Hz) to IEC 60068-2-6, test Fc 10 frequency cycles/axis		
Shock	25 g (11 ms) to IEC 60068-2-27, test Ea		
Corrosion	96 hours at 5 % salt mist to IEC 60068-2-11, test Ka		
Humidity	240 hours at 95 % RH to IEC 60068-2-3, test Ca		
Mass	approx. 45 g		

Approvals


Authority	Voltage ratings	Current ratings
3600:		
VDE (EN 60934)	AC 240 V; DC 65 V	0.05...16 A
CSA/UL	AC 250 V; DC 80 V	0.05...16 A
UL	DC 65 V	0.05...25 A
3900:		
VDE (EN 60934)	AC 240 V; DC 65 V	0.05...10 A

Dimensions

-P10-Si

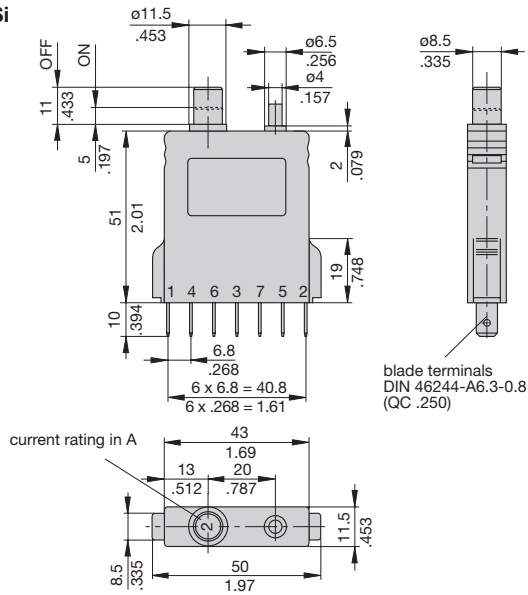


-Si3-R -Si60 -ZR-Si60 -ZR-Si

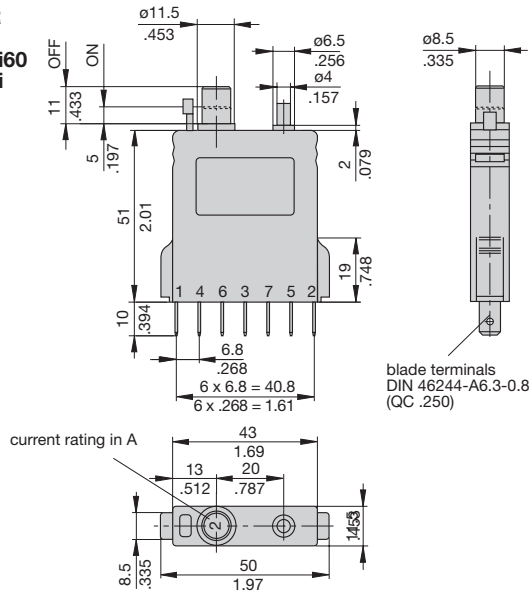


Intermediate position: Holding down reset button and actuating manual release simultaneously.

Installation drawing

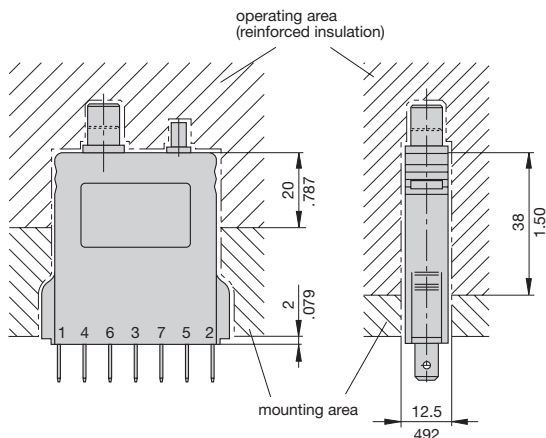


Internal connection diagrams


with shunt terminal (standard) and auxiliary contacts (-Si) only 3600

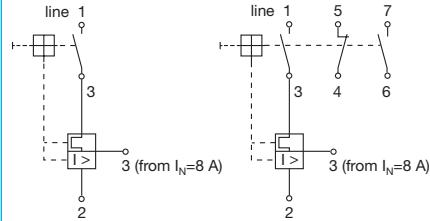


Switching position with auxiliary contacts and reset button (-Si3-R)

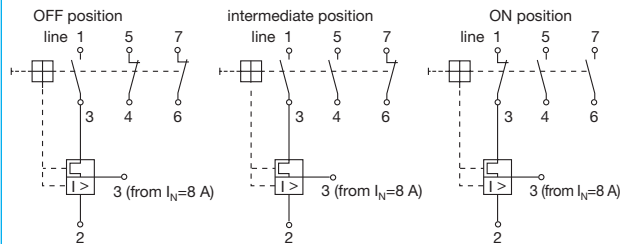


Switching position with special auxiliary contact (-Si60, -ZR-Si60)

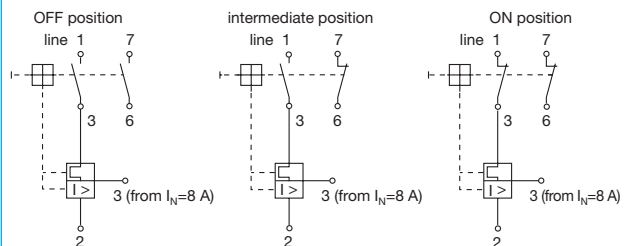

Switching position with intermediate position and auxiliary contacts (3600: -ZR-Si, 3900: -Si)

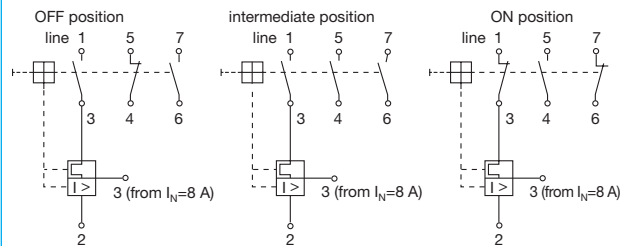


Terminal design -P10

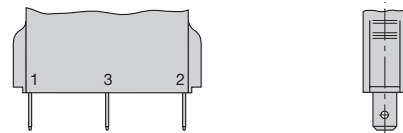

This is a metric design and millimeter dimensions take precedence (mm)
Inch

Typical time/current characteristics

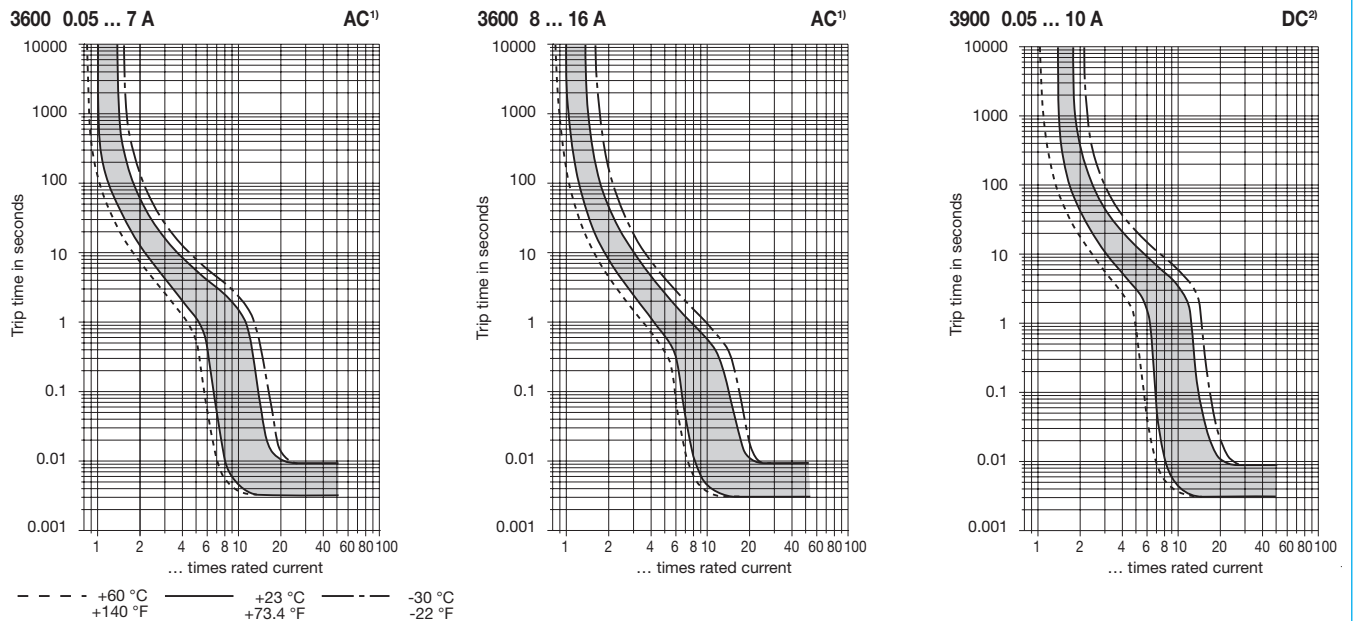

- ¹⁾ Magnetic tripping currents are increased by 20% on DC supplies.
²⁾ Magnetic tripping currents are decreased by 20% on AC supplies.

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.

Ambient temperature °F	-22	-4	+14	+32	+73.4	+104	+122	+140
°C	-30	-20	-10	0	+23	+40	+50	+60
Derating factor	0.76	0.79	0.83	0.88	1	1.08	1.16	1.24

Accessories


Module 17plus

Modular power distribution system for circuit breakers 2210-S, 3600 or 3900.
 For technical details see product group 7.



19" Rack

accommodating up to 30 E-T-A thermal-magnetic circuit breakers type 3600-P10-Si or 3900-P10-Si.
 For technical data see product group 7.

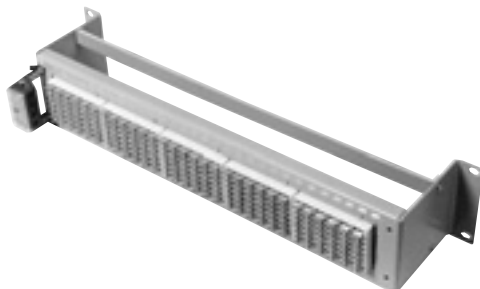

19" Rack 19BGT2 2U

for 18, 24 or 30 circuits.
 For technical data see product group 7.

